

**Regional ground motion hazard for liquefaction and landslide
assessment, Tauranga City**

Technical Report Prepared for Tauranga City Council

Brendon A. Bradley¹

¹Director, Bradley Seismic Limited

Draft 21 May 2019

Revised 21 July 2019

Christchurch, New Zealand

Disclaimer:

This report has been commissioned by Tauranga City Council to provide information on the seismic hazard in Tauranga city, New Zealand for use specifically in regional liquefaction and landslide assessment. The author accepts no liability for the use of the material contained in this document by third parties.

Table of Contents

Executive Summary	4
1. Regional variation in seismic site conditions.....	5
2. Seismic hazard for generic site in central Tauranga	7
3. Spatial ground motion hazard for different exceedance probabilities (/return periods)	11
4. References.....	14

Executive Summary

Peak ground accelerations (PGA) for seismic design of liquefaction and landslide / slope instability are computed for the Tauranga city area. The PGA values vary spatially as a result of different geotechnical conditions, and are provided as spatial maps and tabulated data for GIS plotting. The spatial mapping is enabled through the use of a regional model of Vs30 – which provides a continuous variation in site conditions, in contrast to discrete site classes.

The sections to follow present firstly the modelling of the soil conditions over the city area through the use of a regional Vs30 model (Section 1). Secondly, the seismic hazard results are conveyed in the context of a generic site in central Tauranga to illustrate the variation with exceedance probability and also soil conditions (Section 2). Through a combination of the seismic hazard and spatially-varying soil conditions, regional PGA hazard maps are then obtained (Section 3), and the format of the output is briefly mentioned to enable 3rd-party display of the information in a geographical setting.

1. Regional variation in seismic site conditions

Geotechnical conditions vary over short distances, and can be classified in detail using geotechnical site investigations for the purpose of liquefaction estimation and foundation design. For the purpose of seismic hazard analysis, the principal parameter of interest is the 30-m averaged shear wave velocity, V_{s30} , which varies less significantly than shallow geotechnical conditions, and can be obtained from regional V_{s30} models for use in region-wide applications.

It is noted that V_{s30} provides a continuous representation in the variation of soil conditions for the purpose of seismic hazard analysis calculations, and therefore is preferred over the use of discrete site classifications – such as that used in NZS1170.5, for example. Abrahamson et al. (2008), for example, provide discussion on the treatment of soil conditions through the use of V_{s30} within a range of different empirical ground motion models.

For the Tauranga City area, the model of Foster et al. (2019), as shown in Figure 1, was used to estimate the V_{s30} values – which range from approximately 180-600m/s. This regional V_{s30} model is based on a combination of surficial geology, topographic terrain, and geotechnical and geophysical measurements. Because it is a regional model, it is not a direct substitute for a site-specific geotechnical assessment. As a consequence, the results presented based on this model are useful in the consideration of regional seismic hazard triaging, for example, urban development (e.g. housing and horizontal infrastructure). They are not appropriate for site-specific assessment of high-importance structures (e.g. multi-storey commercial or industry structures) in lieu of conventional prescriptive design standards and guidelines.

It is important to note that this model provides values only for areas of native land, that is, reclaimed land in the Port of Tauranga area is not included. The V_{s30} values are lowest (180-220m/s) in low-lying regions that are particularly susceptible to liquefaction. Generally sites with $V_{s30} > 300$ m/s are unlikely to be susceptible to liquefaction.

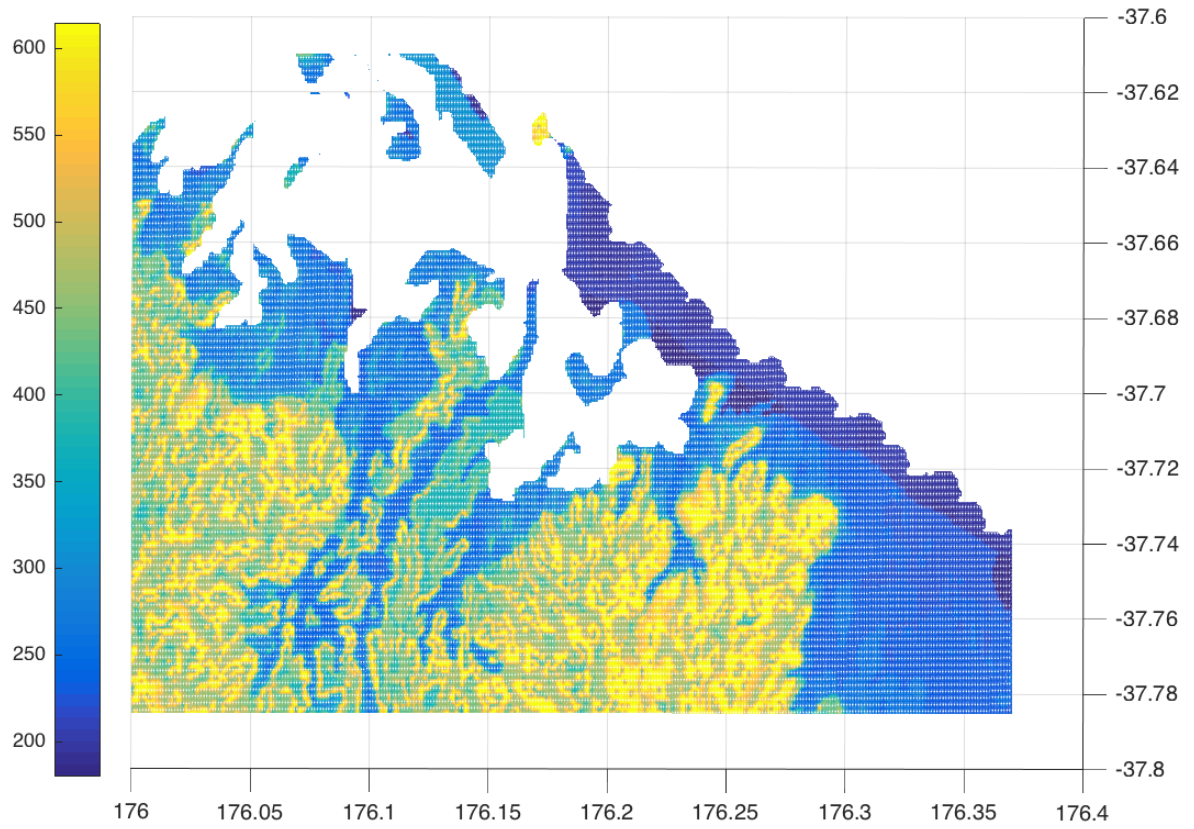


Figure 1: Variation in 30m shear wave velocity (V_{s30}) (colors in units of m/s) in the Tauranga city region. Latitude and Longitude in WGS84 units.

2. Seismic hazard for generic site in central Tauranga

A probabilistic seismic hazard analysis (PSHA) for a site in central Tauranga was computed to characterise the ground motion PGA hazard for the city area. Because of the small spatial extent of the city area, and that the hazard is dominated by distributed seismicity (as discussed below), the variation in seismic hazard due to geographical location in this area is small. The primary factor in the variation in the seismic hazard is the local soil conditions (as quantified via Vs30, presented in the previous section). As a result, the seismic hazard for a generic site in central Tauranga city is illustrated in this section to indicate the effect of soil conditions.

PSHA is based on an earthquake rupture forecast (ERF), defining the location, characteristics, and frequency of earthquakes, as well as ground motion prediction equations which predict the ground motion intensity for a given earthquake rupture. Kramer (1996) provides an introduction to PSHA. Computations were performed using the OpenSHA software (2005). Additional computational parameters are provided in Appendix A.

2.1. Earthquake rupture forecast (ERF)

The seismic hazard analyses performed utilize the model of Stirling et al. (2012), which was completed in mid-2010, and represents a national consensus model at that time. Figure 2 illustrates the mapped faults in the region.

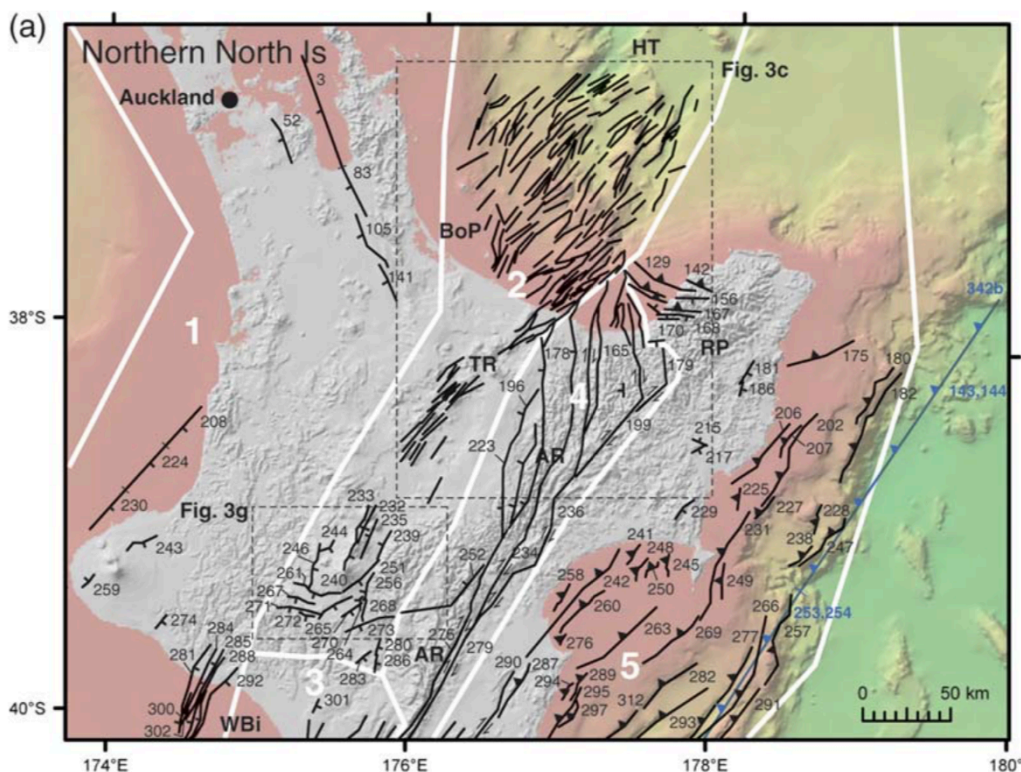


Figure 2: Mapped fault structures in the Northern North Island. The seismic hazard at the site is predominately affected by distributed seismicity as well as nearby faults in the offshore region.

Since the publication of Stirling et al. additional research has been documented on the Kerepehi fault system. Persaud et al. (2016) provide a recent summary of paleoseismic

evidence of rupture on the Kerepehi fault system. It is noted that the field investigation data in this paper is the same data used in the national consensus model of Stirling et al. (2012) (Stirling et al. refer to ‘unpublished data’ – i.e. Persaud et al. is the resulting publication of this data). The primary difference is that Persaud et al. describe the fault system through the use of 7 different segments (based on surface expression), while Stirling et al. aggregate several segments in order to represent the system using 4 distinct rupture scenarios (which result in larger potential magnitude events – which is more important for seismic hazard calculations). The total length of faults in both cases is approximately 150km; and the average recurrence intervals, excluding the offshore segment, is approximately the same (6000 years). As a result, the use of the Kerepehi fault system modelling in Stirling et al. still represents best available science.

The Hikurangi subduction interface is the major seismic source in the upper North Island, however the subsequent hazard analyses illustrate that the distance of nearly 200km is such that it does not make an appreciable contribution to the seismic hazard at the site.

2.2. Ground motion prediction equations (GMPEs)

Two ground motion models were considered for seismic hazards resulting from shallow crustal and subduction earthquake sources. The NZ-specific Bradley (2013) model for shallow crustal earthquakes, and the Zhao et al. (2006) model was used for subduction zone sources, though the latter do not contribute any significant contribution to the seismic hazard at this site.

2.3. Seismic hazard results

Figure 3 illustrates the seismic hazard at the generic site for seven different values of V_{s30} , which encompass the range of values across the Tauranga city region. There is a general trend of higher hazard for lower values of V_{s30} – i.e. the largest relative hazard occurs in softer soil sites (with lower V_{s30} values).

For comparison, the dashed black and grey line illustrates the PGA hazard from NZS1170.5:2004 ($Z=0.20$) and the NZGS guidelines (NZGS, 2016), based on $C_{0,1000}=0.34$ for Tauranga and site class D soil conditions. The site-specific hazard and code/guideline-based hazard are similar for smaller return periods, but the code/guideline-based hazard is conservative for the larger return periods. Further explanation for these differences is provided in Section 2.4.

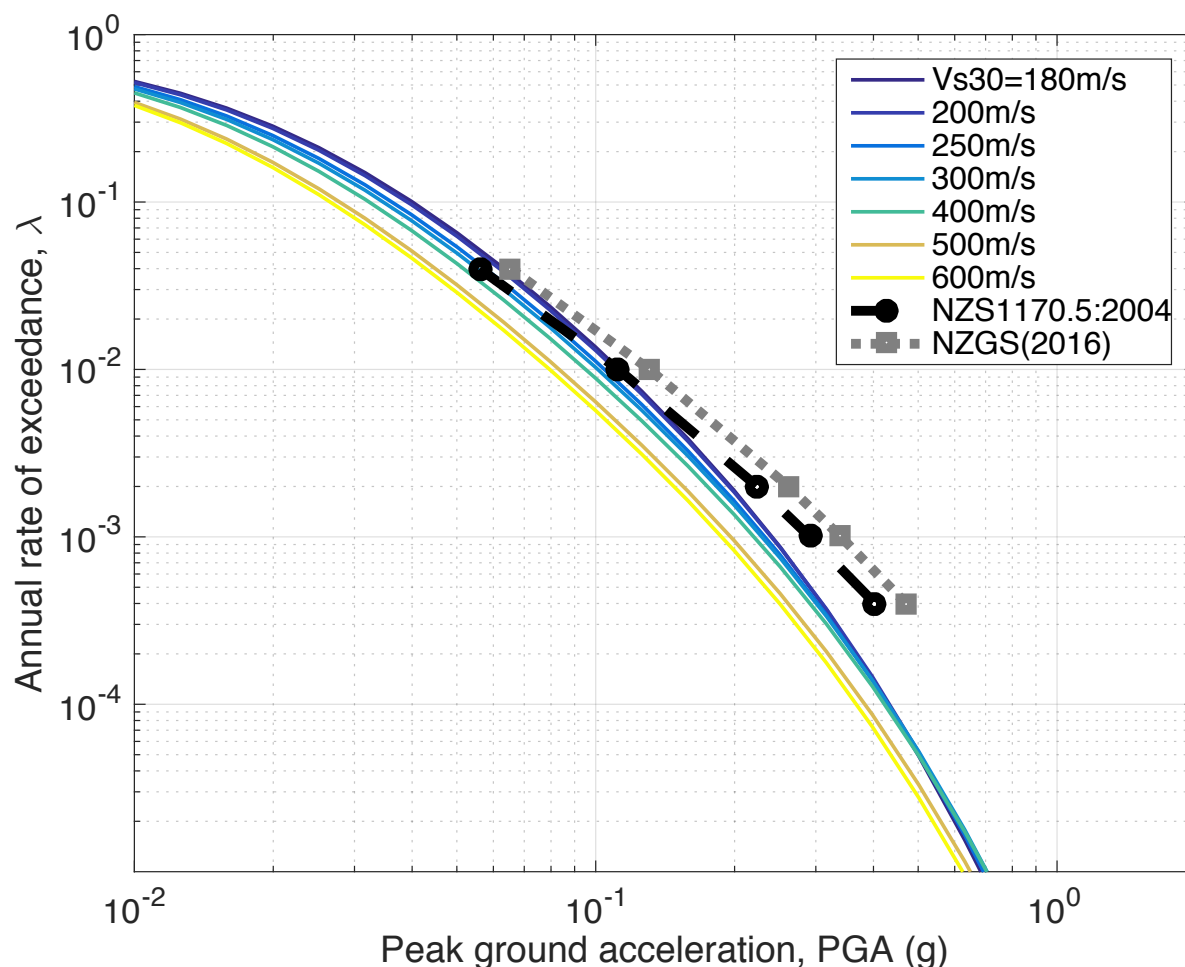


Figure 3: Seismic hazard curves for peak ground acceleration illustrating the effect of soil conditions as quantified through V_{s30} . The code and guideline-based hazard curves from NZS1170.5 and NZGS (2016) are also provided for reference.


Figure 4 illustrates the seismic hazard disaggregation results – which simply represent the fractional contribution of different seismic sources to the aggregate seismic hazard (i.e. Figure 3). Figure 4 illustrates that the hazard is dominated by nearby distributed seismicity (accounting for unmapped faults), although approximately 10% of the hazard is contributed by earthquakes on the distant Hikurangi subduction zone.

For use in geohazard analyses (liquefaction and landslide) the mean magnitude is often useful. The mean magnitude ranges from 6.1-6.3 across the different cases considered. It is practically independent of site conditions (V_{s30}), but does vary in a predictable manner with return period. For the 100 year return period the mean magnitude is 6.1; while for the 1000 year return period it is 6.3 (and similarly for the 3030 year return period).


Table 1: Mean magnitude with return period

Return period	25	100	500	1000	3030
Mean magnitude	6.1	6.1	6.2	6.3	6.3



(a) Vs180m/s / 100 years

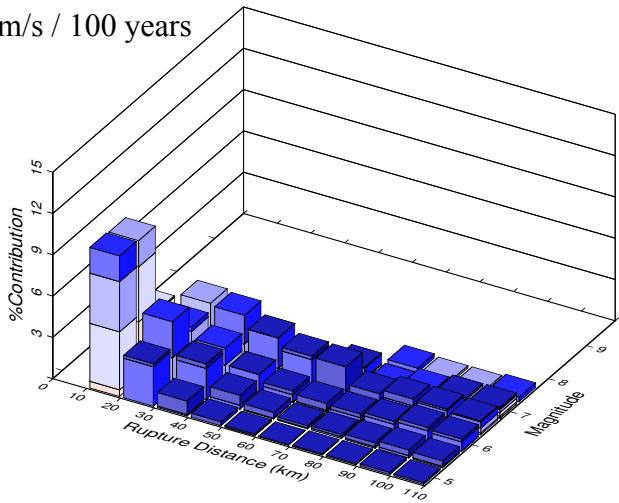

(b) Vs300m/s / 100 years

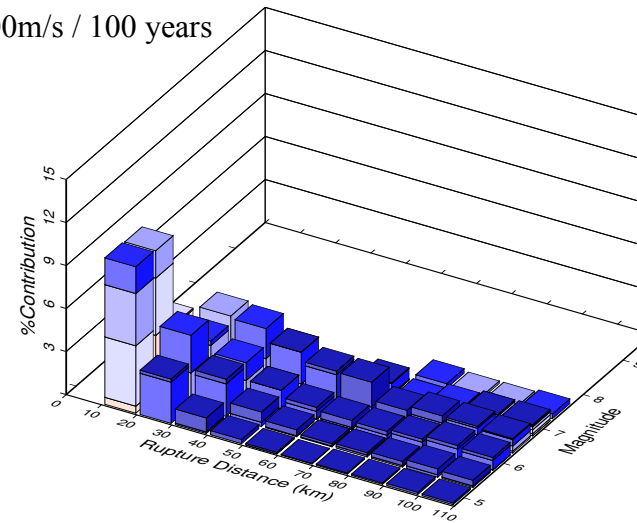

(c) Vs180m/s / 1000 years

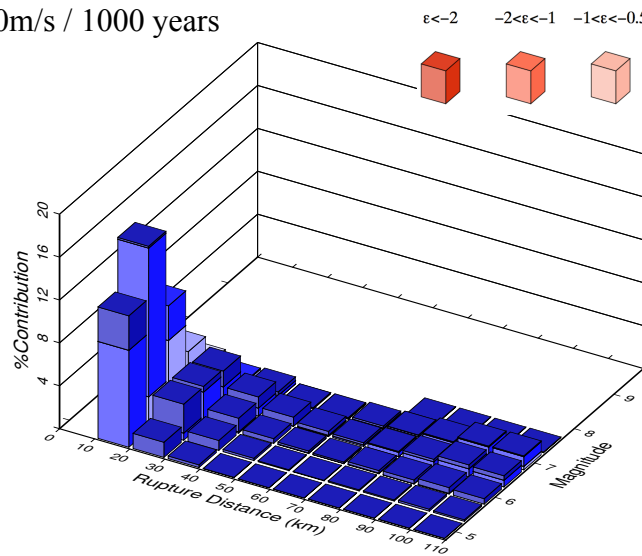

(d) Vs300m/s / 1000 years

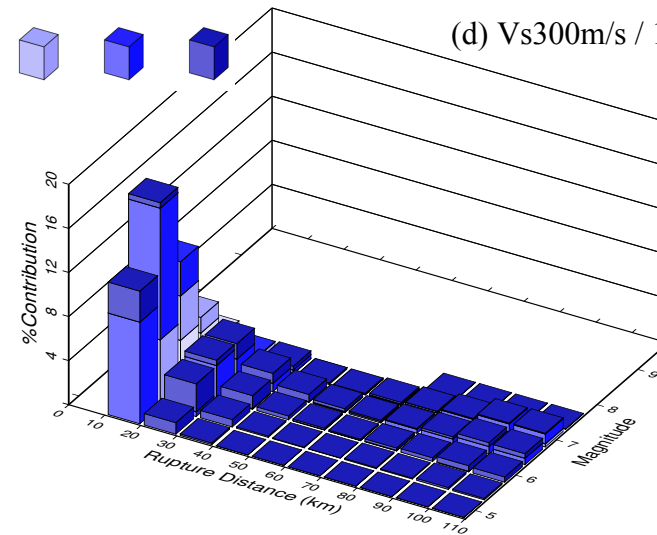


Figure 4: Disaggregation plots for seismic hazard analysis for different exceedance probabilities and soil conditions.

2.4. Reasons for differences between site-specific and NZGS/NZS1170.5 hazard

There are numerous reasons for the differences between the NZGS/NZS1170.5-based guideline/code and site-specific hazard results shown in this section, most notably:

1. The site-specific values presented here are ‘direct’ results obtained from probabilistic seismic hazard analyses, and not ‘codified’ values within a functional methodology adopted for design codes, which is intentionally conservative (McVerry 2003). This is illustrated, for example, by the different ‘shape’ of the site-specific hazard as a function of return period, relative to the code-based variation.
2. The NZS1170.5-based hazard (with $Z=0.20$), and NZGS (2016) (with $C_{0,1000}=0.34$) was derived based on science in 2002 (in preparation for the 2004 code document). This study uses up-to-date information on seismic sources (consensus models from 2012, that are still relevant to the present day, (Stirling et al., 2012)) and ground motion modelling which has been specifically developed for NZ conditions, and independently validated using recent earthquake observations in the Canterbury earthquake sequence (Bradley, 2013).
3. The difference between NZS1170.5 and NZGS is primarily the difference between magnitude weighted and unweighted PGA values.
4. The general reason for the conservatism in the NZGS (and NZS1170.5) values is that the McVerry et al. (2006) ground motion model used in the development of these standard/guideline numbers is known to appreciably over-estimate PGA amplitudes from small-to-moderate magnitude earthquakes, as explained in further detail by Bradley (2013). For this specific site, the earthquake sources are such that small-to-moderate magnitudes dominate the seismic hazard. The effect of this conservatism increases as the exceedance rate reduces for the same reason.

3. Spatial ground motion hazard for different return periods

Based on the PGA seismic hazard (i.e. Figure 3), and the site conditions over the region (i.e. Figure 1), maps of PGA over the region can be obtained. An example for the 1000 year return period is provided in Figure 5.

Digital files are also provided with [Lon,Lat,PGA] triplets to enable TCC to produce such spatial information in their desired format for the 25, 100, 500, 1000, and 3030 year return periods.

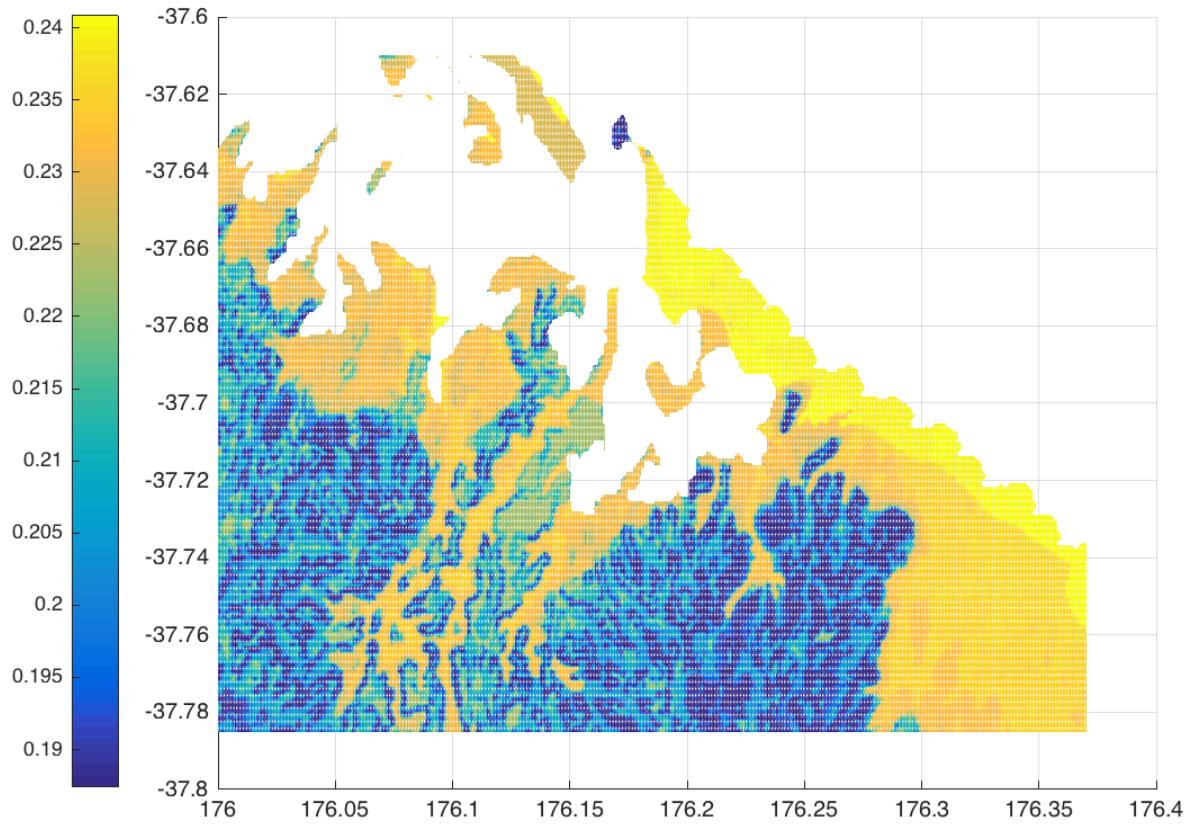


Figure 5: Example PGA hazard map for the 1000 year return period over the Tauranga City region

Example output file format:

Lon, Lat, PGA

176.00000	-37.78500	0.163
176.00040	-37.78500	0.162
176.00050	-37.78500	0.159
176.00060	-37.78500	0.157
176.00070	-37.78500	0.154

4. Limitations and Application

The primary limitation in this work comes from the use of a regional Vs30 model, as opposed to using site-specific geotechnical and geophysical measurements. This regional Vs30 model is based on a combination of surficial geology, topographic terrain, and geotechnical and geophysical measurements. Because it is a regional model, it is not a direct substitute for a site-specific geotechnical assessment. As a consequence, the results presented based on this model are useful in the consideration of regional seismic hazard triaging, for example, urban development (e.g. housing and horizontal infrastructure). They are not considered appropriate as a substitute for a site-specific assessment of commercial or industrial structures in lieu of conventional prescriptive design standards and guidelines.

Because the results presented here are based on this regional Vs30 model then, where possible, specific geotechnical measurements should be used to confirm that the model assumptions are appropriate before adopting the consequent results. For example, regional geotechnical investigations for prospecting urban development will provide the means by which Vs30 values can be ascertained (e.g. if CPT information is obtained, as is typical, then the correlation of McGann et al. (2015) can be used to infer Vs values, and then the correlation of Boore et al. (2011) can be used to infer Vs30 if the CPT depth is less than 30m).

5. References

- Abrahamson, N. A., Atkinson, G. M., Boore, D. M., Bozorgnia, Y., Campbell, K. W., Chiou, B., Idriss, I. M., et al., 2008. Comparisons of the NGA Ground-Motion Relations. *Earthquake Spectra*, **24**(1), 45–66.
- Boore, D. M., Thompson, E. M., and Cadet, H., 2011. Regional Correlations of VS30 and Velocities Averaged Over Depths Less Than and Greater Than 30 Meters. *Bulletin of the Seismological Society of America*, **101**(6), 3046–3059. DOI: 10.1785/0120110071
- Bradley, B. A., 2013. A New Zealand-Specific Pseudospectral Acceleration Ground-Motion Prediction Equation for Active Shallow Crustal Earthquakes Based on Foreign Models. *Bulletin of the Seismological Society of America*, **103**(3), 1801–1822. DOI: 10.1785/0120120021
- Field, E. H., Gupta, N., Gupta, V., Blanpied, M., Maechling, P., and Jordan, T. H., 2005. Hazard calculations for the WGCEP-2002 forecast using OpenSHA and distributed object technologies. *Seismological Research Letters*, **76**, 161–167.
- Foster, K., Bradley, B. A., McGann, C. R., and Wotherspoon, L. M., 2019. A Vs30 map for New Zealand based on geologic and terrain proxy variables and field measurements. *Earthquake Spectra*, ((to appear)).
- Kramer, S. L., 1996. *Geotechnical earthquake engineering*. Upper Saddle River, NJ.: Prentice-Hall.
- McGann, C. R., Bradley, B. A., Taylor, M. L., Wotherspoon, L. M., and Cubrinovski, M., 2015. Development of an empirical correlation for predicting shear wave velocity of Christchurch soils from cone penetration test data. *Soil Dynamics and Earthquake Engineering*, **75**, 66–75. DOI: 10.1016/j.soildyn.2015.03.023
- McVerry, G. H., Zhao, J. X., Abrahamson, N. A., and Somerville, P. G., 2006. New Zealand acceleration response spectrum attenuation relations for crustal and subduction zone earthquakes. *Bulletin of the New Zealand Society for Earthquake Engineering*, **39**(1), 1–58.
- NZGS, 2016. *Earthquake Geotechnical Engineering Module 1 - Overview of the guidelines* (p. 36). New Zealand Geotechnical Society. Retrieved from <https://www.nzgs.org/library/earthquake-geotechnical-engineering-module-1-overview-of-the-guidelines/>
- Persaud, M., Villamor, P., Berryman, K., Ries, W., Cousins, J., Litchfield, N., and Alloway, B., 2016. The Kerepehi Fault, Hauraki Rift, North Island, New Zealand: active fault characterisation and hazard. *New Zealand Journal of Geology and Geophysics*, **59**(1), 117–135. DOI: 10.1080/00288306.2015.1127826
- Stirling, M., McVerry, G., Gerstenberger, M., Litchfield, N., Van Dissen, R., Berryman, K., Barnes, P., et al., 2012. National seismic hazard model for New Zealand: 2010 update. *Bulletin of the Seismological Society of America*, **102**(4), 1514–1542. DOI: 10.1785/0120110170
- Zhao, J. X., Zhang, J., Asano, A., Ohno, Y., Oouchi, T., Takahashi, T., Ogawa, H., et al., 2006. Attenuation relations of strong ground motion in Japan using site classification based on predominant period. *Bulletin of the Seismological Society of America*, **96**(3), 898–913. DOI: 10.1785/0120050122

McVerry G 2003. From hazard maps to code spectra for New Zealand. 2003 Pacific conference on earthquake engineering. Christchurch, New Zealand. Pp. 9.